





Miter Gauge Stop Rod

Item No. 505629


Effective Date: August 1, 1980

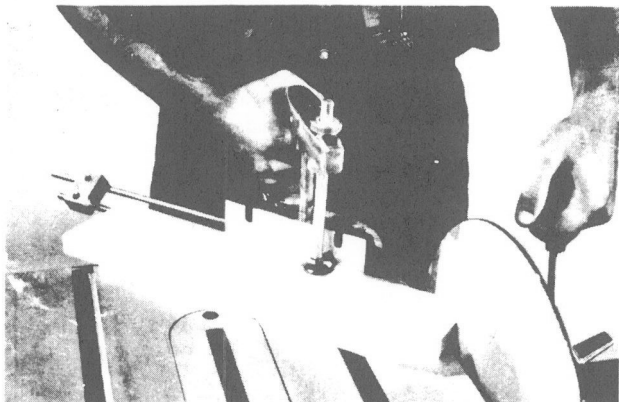

The Miter Gauge Stop Rod is used to cut several work pieces to the same length without repeated measurements. By adjusting the two steel rods, duplicate pieces may be cut to any length from 0" to 18". Two set screws are provided for locking the stop rod into either side of the MARK V miter gauge (on Shopsmith Model 10ER, see note below).

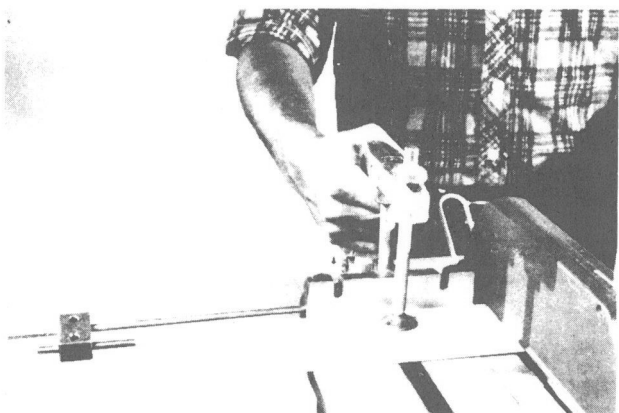

Note: The Miter Gauge Stop Rod can be used on either side of the miter gauge, depending upon whether the gauge is used in the right or left table slot.

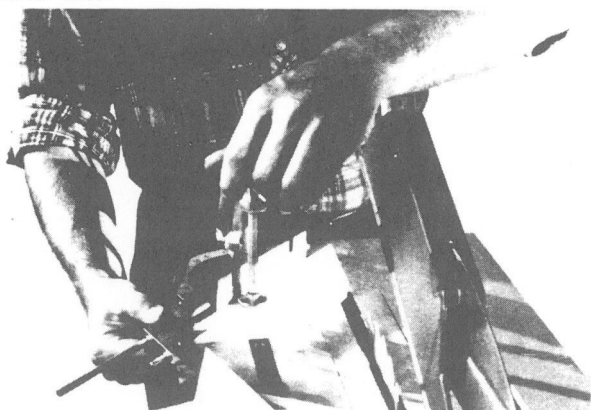

FOR DUPLICATING LENGTHS UP TO 8":

When cutting duplicate pieces up to 8" in length, insert short rod in miter gauge hole and clamp with set screw provided. The long rod then becomes an adjustable stop which will accommodate any length up to 8". It is clamped with the set screw provided.

FOR DUPLICATING LENGTHS FROM 8" TO 18":

When cutting duplicate pieces longer than 8", insert long rod into miter gauge hole and clamp with set screw. The short rod and clamp can then be moved on the long rod to provide an adjustable stop up to 18".

PARTS LIST

part no.	Description
503786	Rod-Stop
503787	Pin — Stop Rod
503788	Lug — Stop Rod
222458	Screw — Socket Set (2)
222460	Screw — Socket Set (2)

NOTE: 10ER Miter Gauge requires purchase of a standard 1/4-20x1" Thumb Screw.

Manufactured by



Shopsmith Inc.

The Home Workshop Company
750 Center Drive
Vandalia, Ohio 45377